



6AB5/6N5

ELECTRON-RAY TUBE

INDICATOR TYPE WITH TRIODE UNIT

6AB5



Heater [■]	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.15	amp.
Overall Length	3-13/16" to 4-3/16"	
Maximum Seated Height	3-9/16"	
Maximum Diameter	1-3/16"	
Bulb	T-9	
Base	Small 6-Pin	
Pin 1 - Heater		Pin 4 - Target
Pin 2 - Plate		Pin 5 - Cathode
Pin 3 - Grid		Pin 6 - Heater
Mounting Position		Any

MAXIMUM RATINGS and TYPICAL OPERATING CONDITIONS

Plate-Supply Voltage		180	max. volts
Target Voltage		{ 180	max. volts
		{ 100	min. volts
Typical Operation:			
Plate and Target Supply	135	135	volts
Series Triode-Plate Resistor [□]	0.25	1.0	megohm
Target Current † ^Δ	2	1.9	ma.
Triode-Plate Current ^Δ	0.5	0.13	ma.
Triode-Grid Voltage (approx.)			
For shadow angle of 0°	-10	-15.5	volts
For shadow angle of 90°	0	0	volts

- In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.
- Designated as R in circuit diagram under Type 6E5.
- † Subject to wide variations.
- Δ For triode-grid bias of 0 volts.
- ← Indicates a change.

April 15, 1940

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.


DATA

6AB5



6AB5

AVERAGE CONTROL CHARACTERISTICS

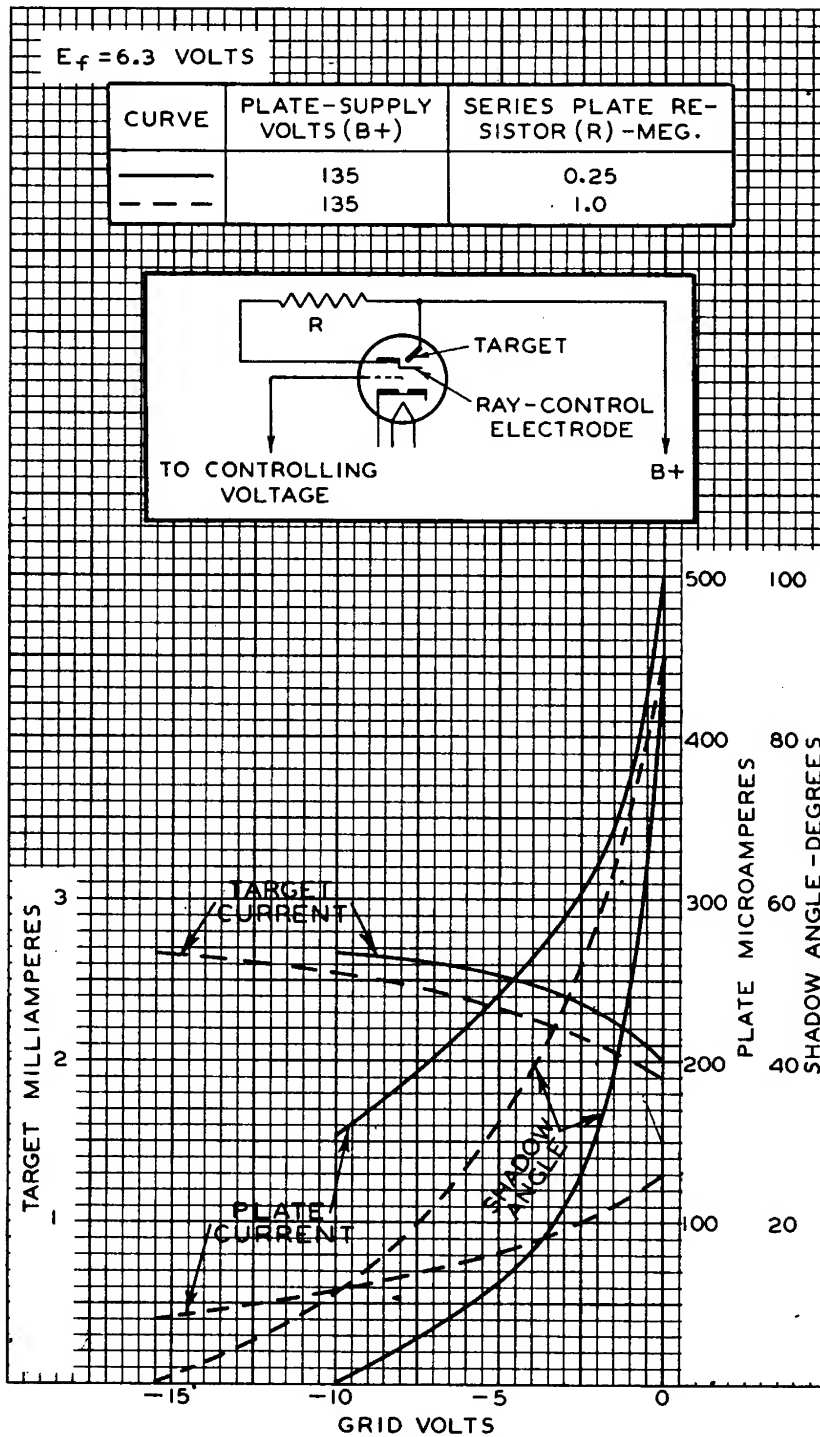

MAY 7, 1940

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4890R1